




Kokoonpanoaika
8/2hlö




Ikäsuositus
+3




Käyttäjiä
kerralla
16



Korkeus
1360 mm




Leveys
4490 mm




Pituus
5590 mm







Maksimi
putoamiskorkeus
400 mm






Turva-alue
52 m²

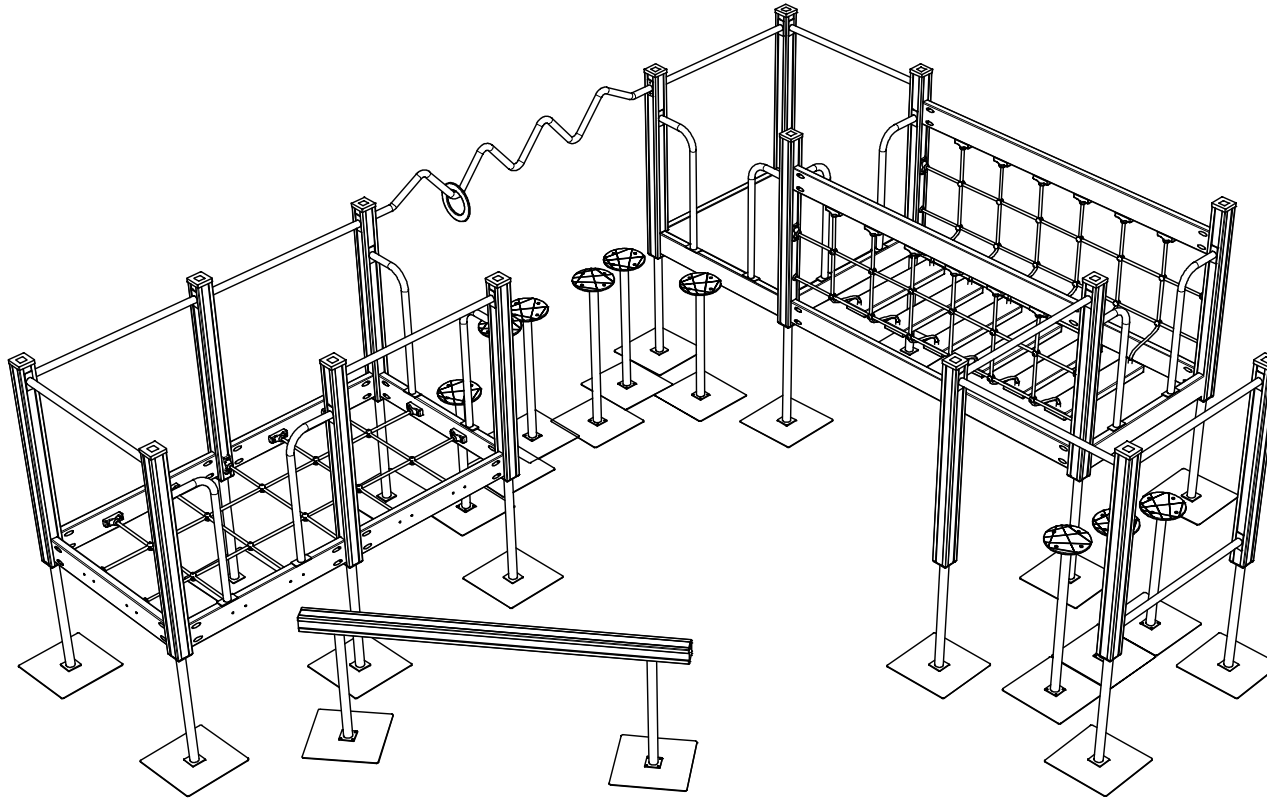


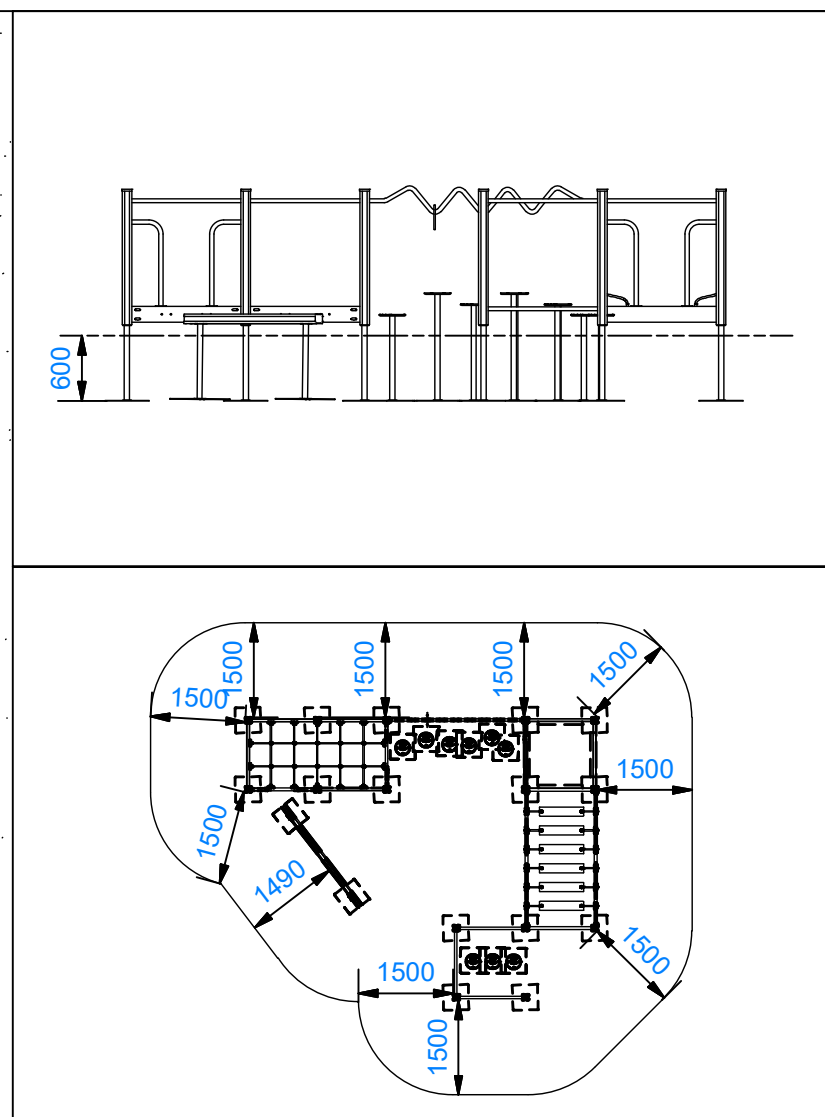

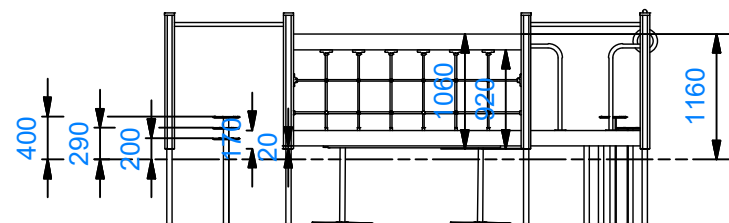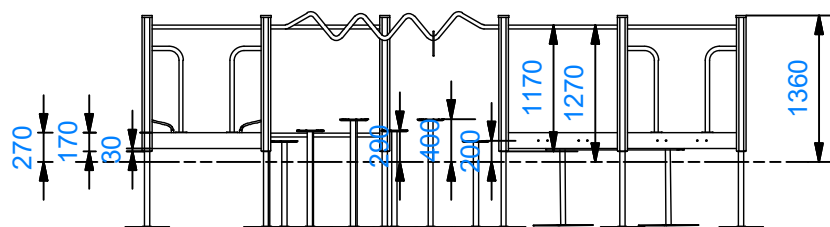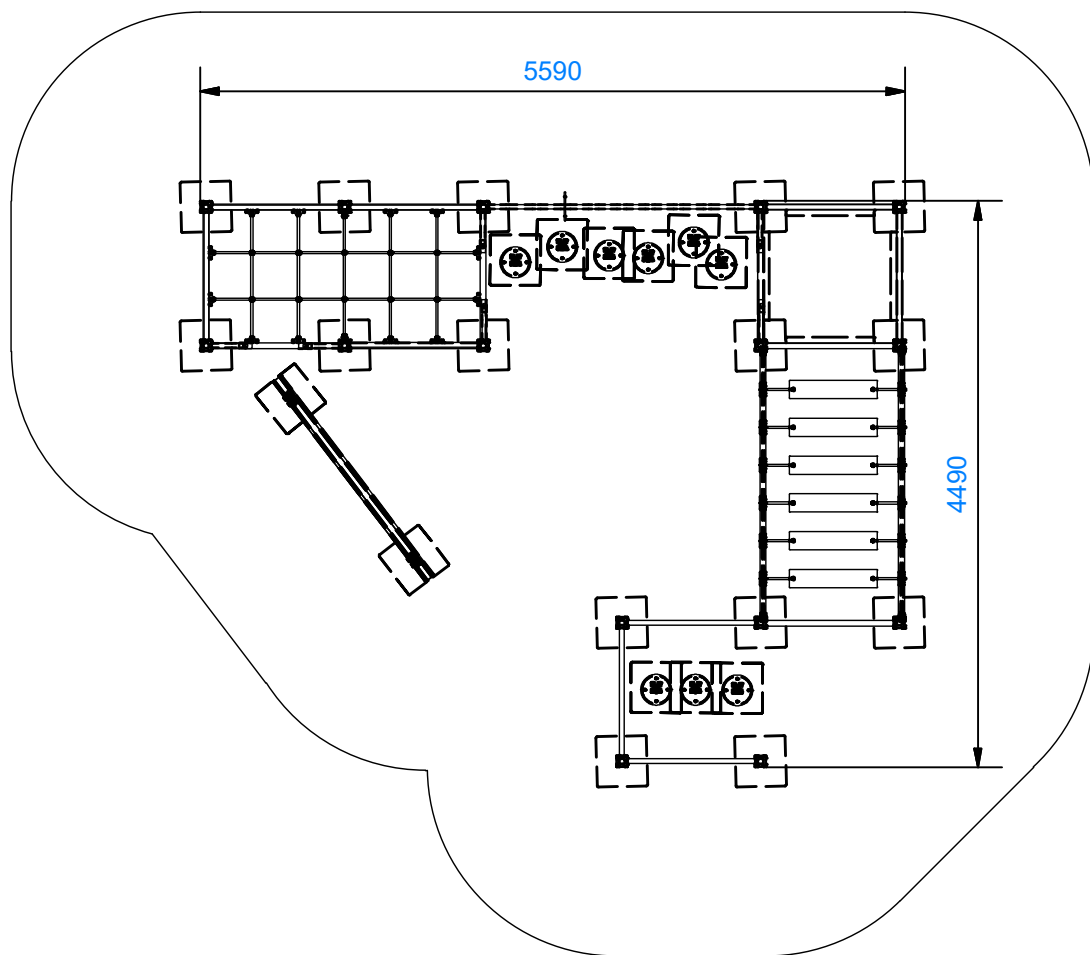


M00140 5	M00164 1	M00060 1	PU-00077 6	M00184 1	M00058 4	PU-00129 15	M00059 15	M00083 15
								
ME-00087 26	HL-00232 1	M00288 2	PU-00188 1	M00295 9	ME-00594 3	M00157 10	ME-00065 3	M00296 1
								
ME-00593 3	M00285 1	M00167 10	M00227 6					
								

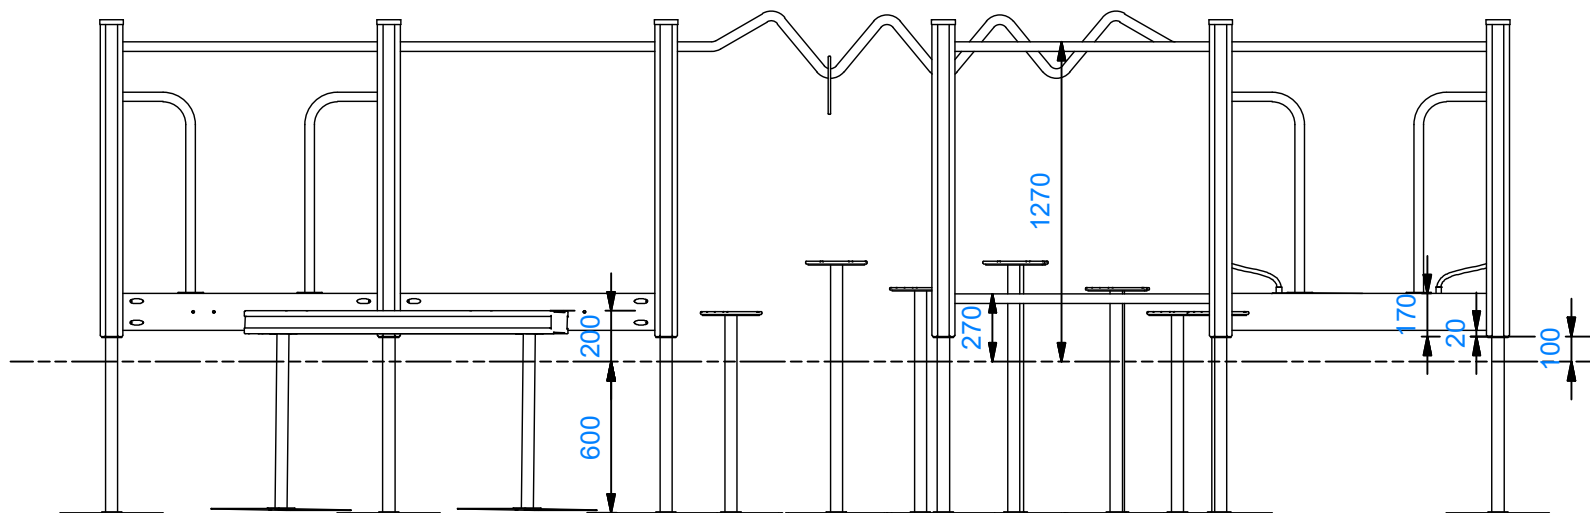


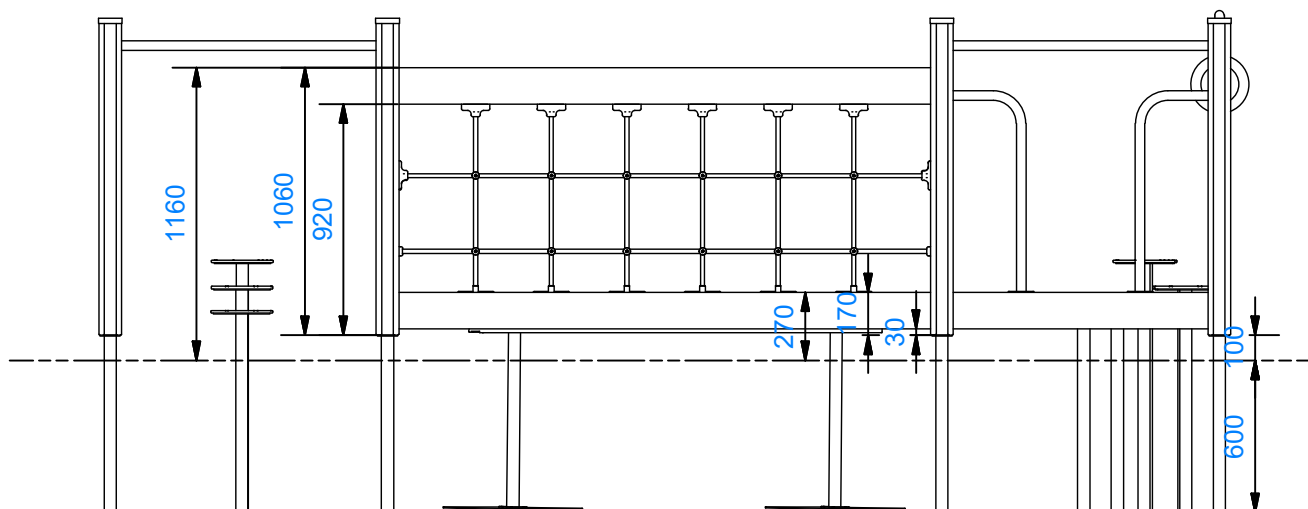



Maa-ankkurin asennus

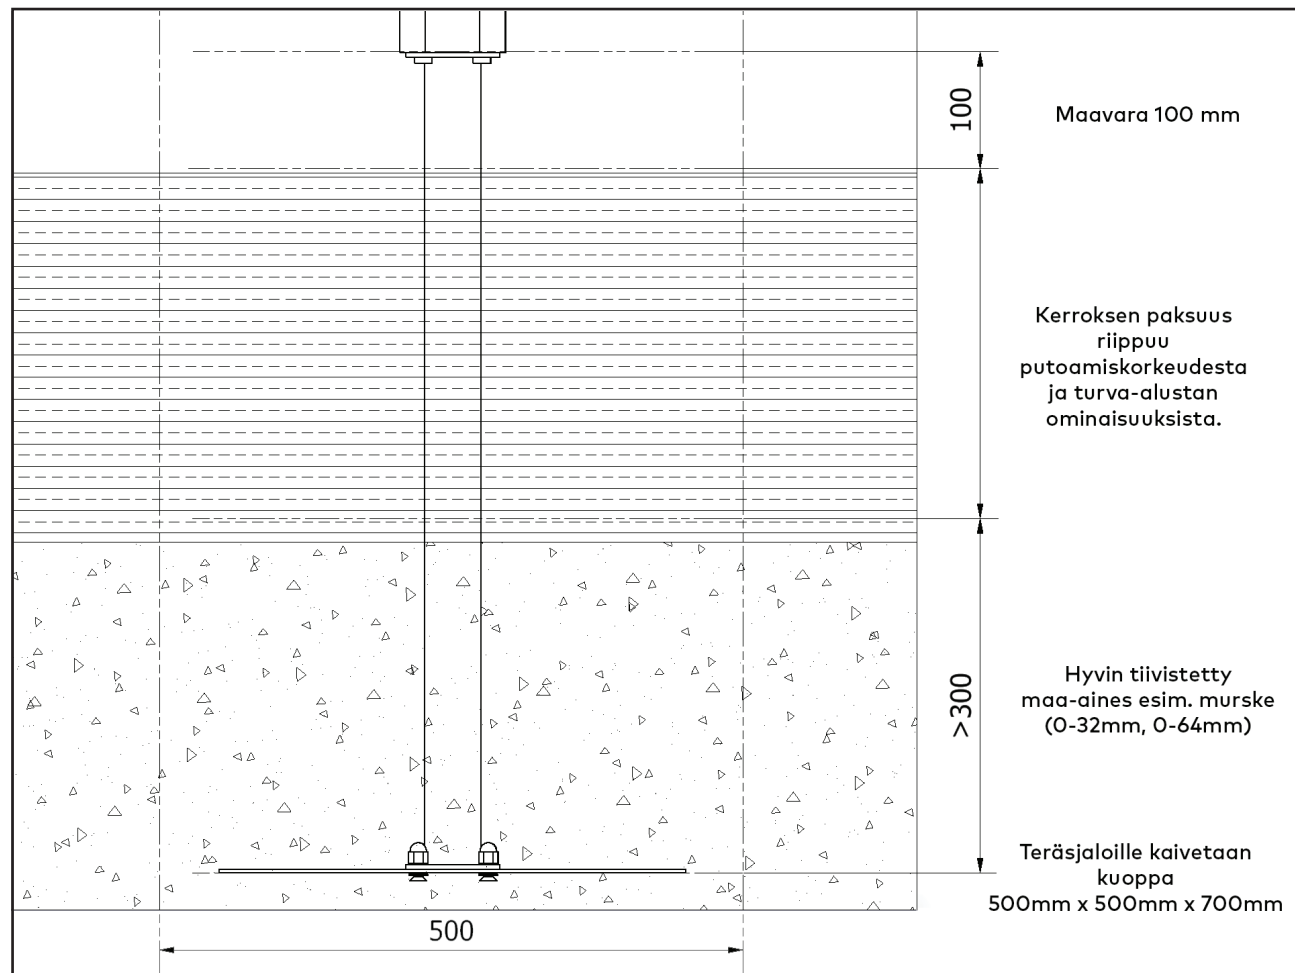



Maa-ankkurin asennus

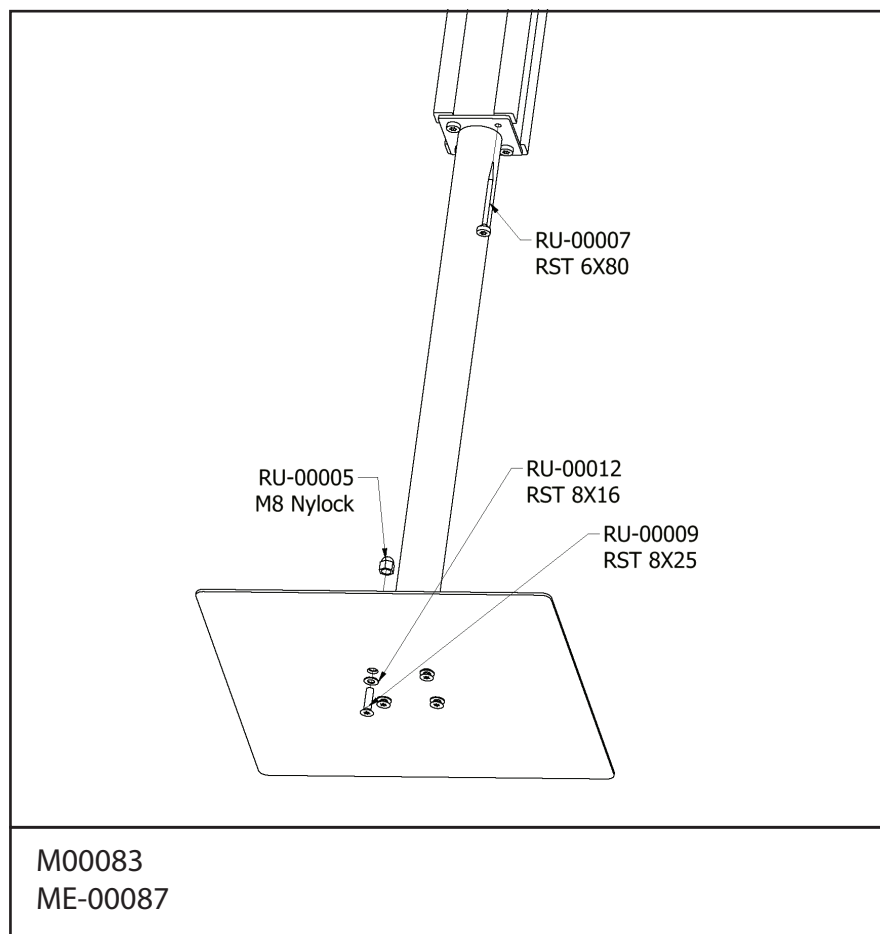


Tasopuun asentaminen

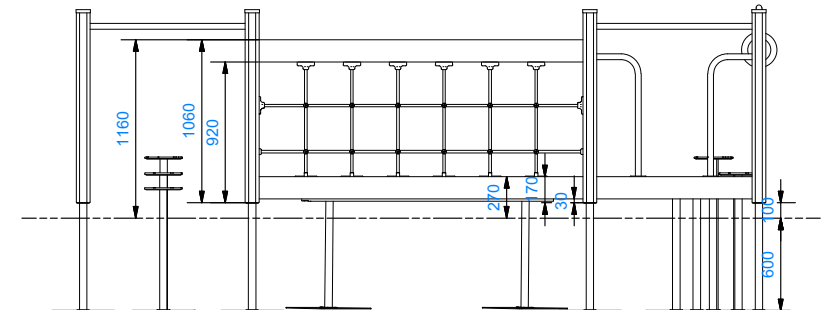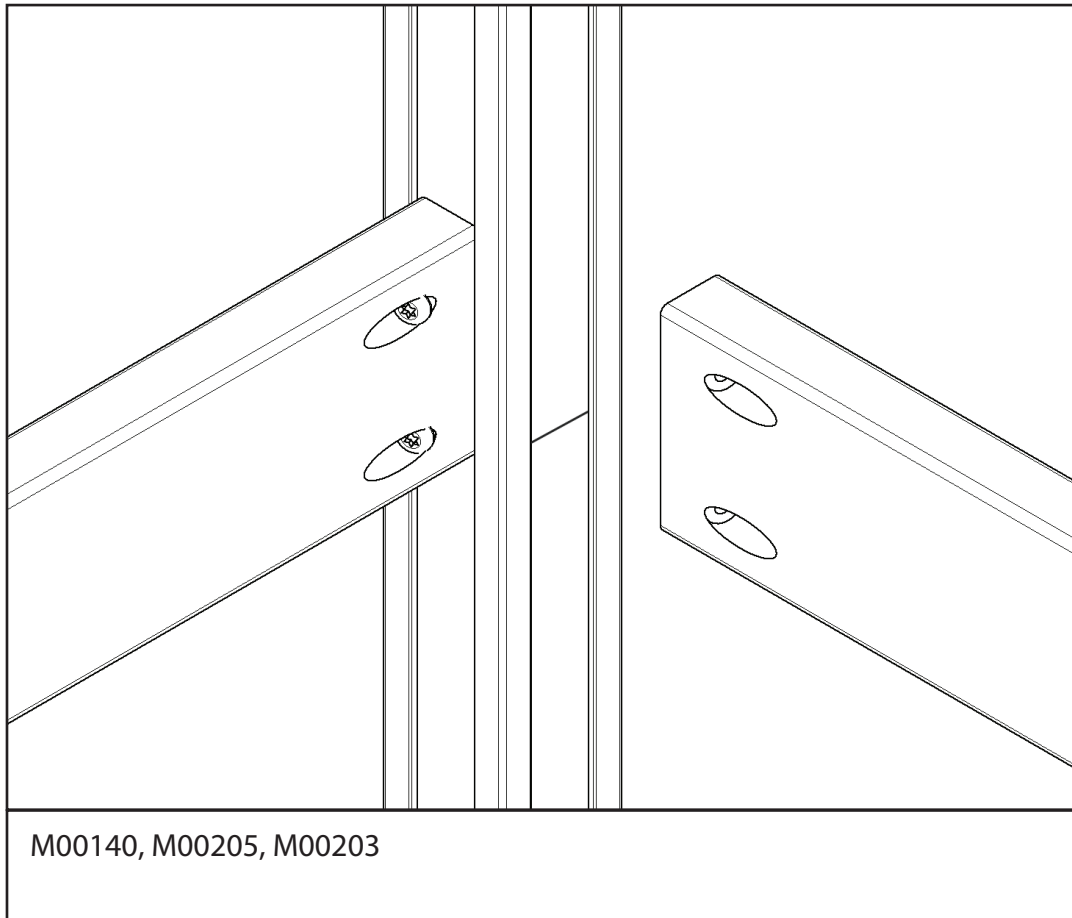

Tasopuun asentaminen

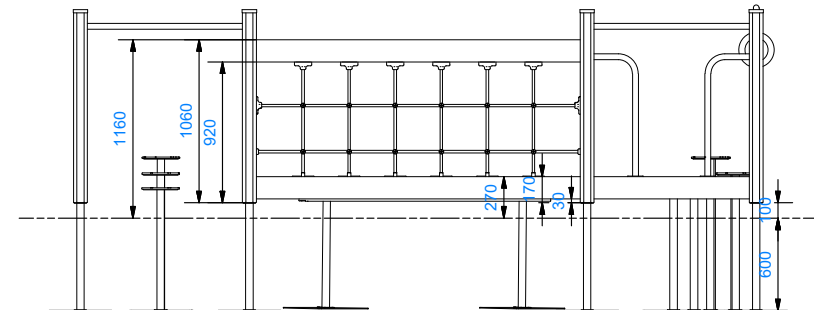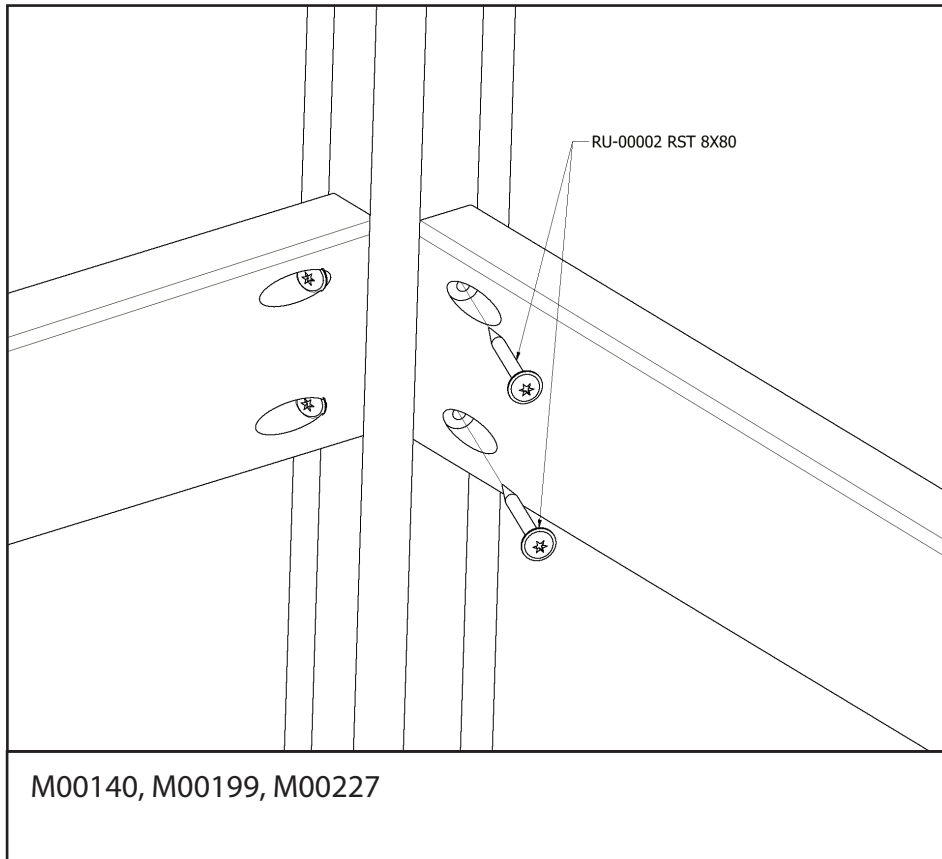



Lattiavanerin asentaminen

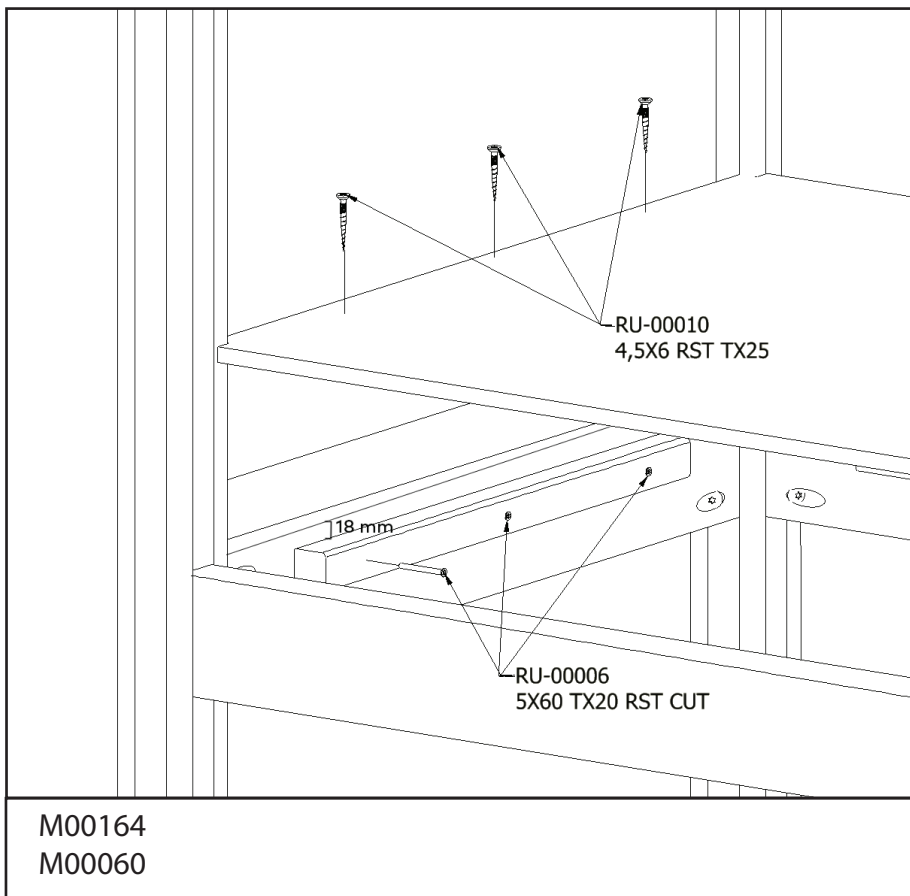

Käytettävä
esiporausta


Kiinnikerimat 4 kpl
asennetaan niin että
riman ja tasopuun
yläpintojen erotus on
18 mm.

Turvakaiteiden sekä tankojen asentaminen

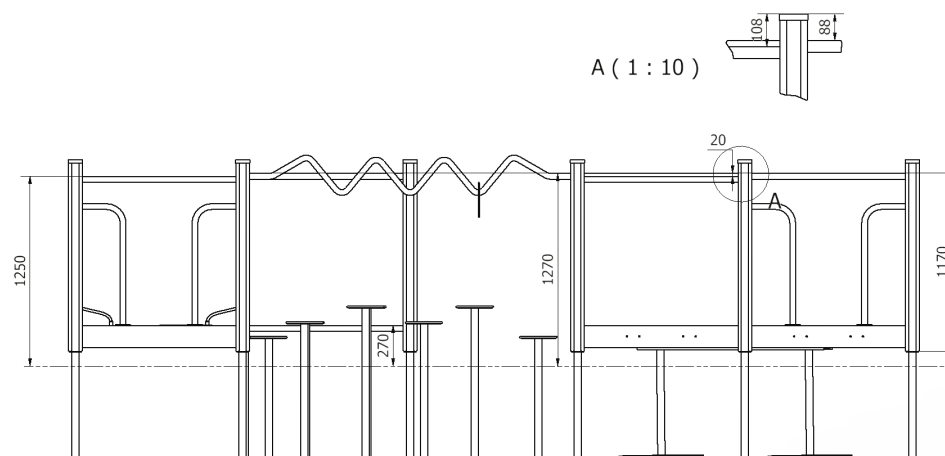
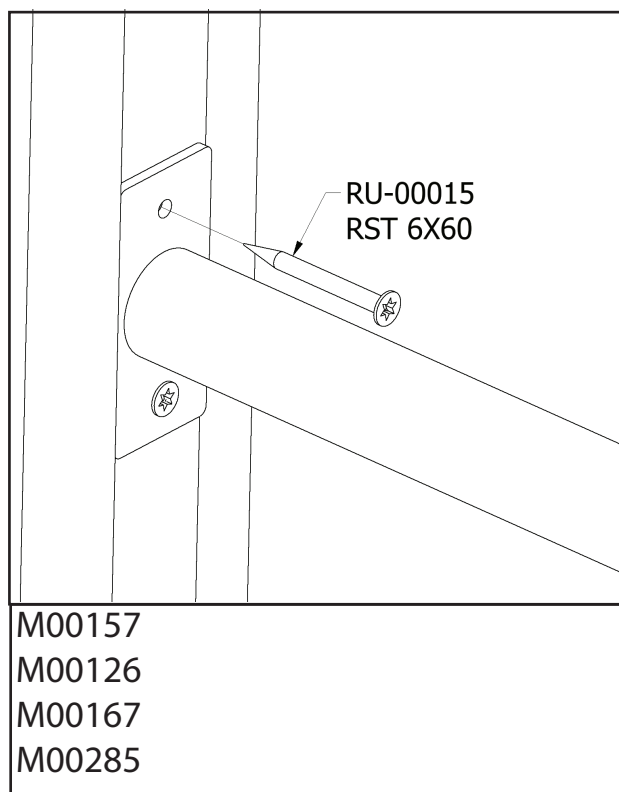


Huomioi peräkkäisten tankojen asennuksessa 20 mm korkeusero

Verkon asentaminen

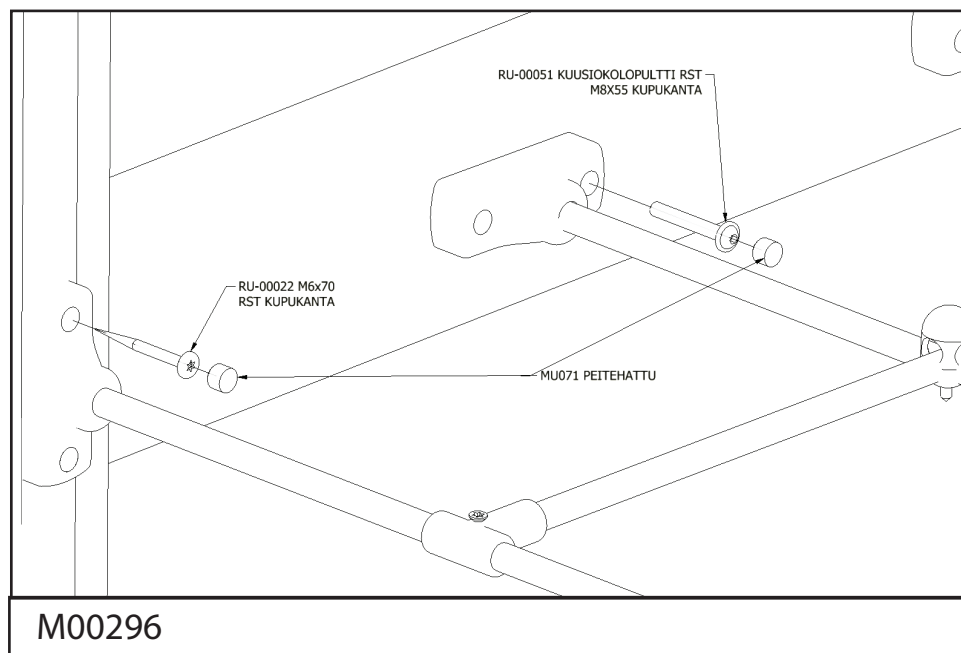



Sillan asentaminen

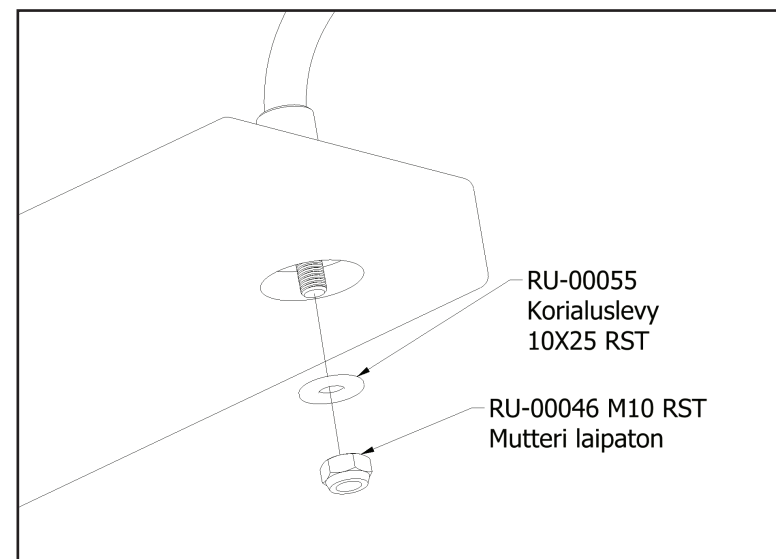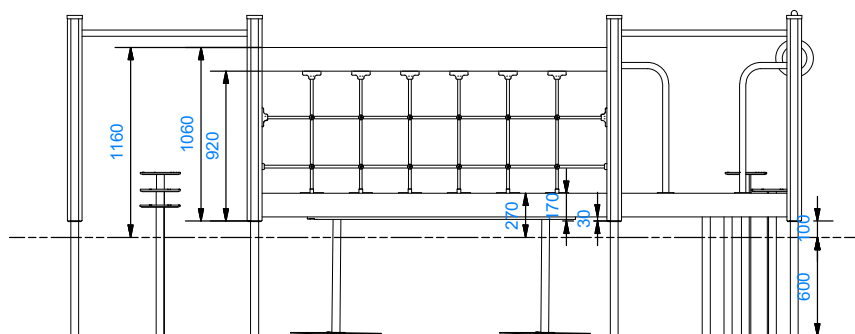

M00184

Tasapainoaskelmien asennus

Asennetaan
600 mm
syvyyteen.

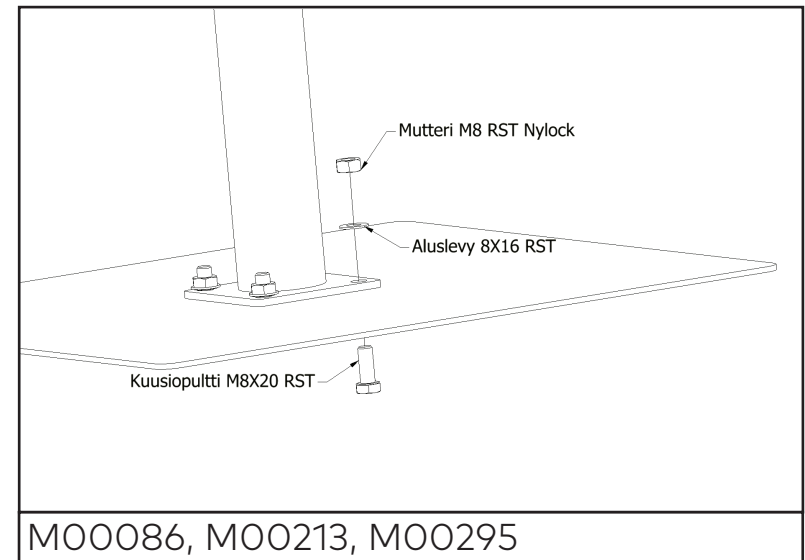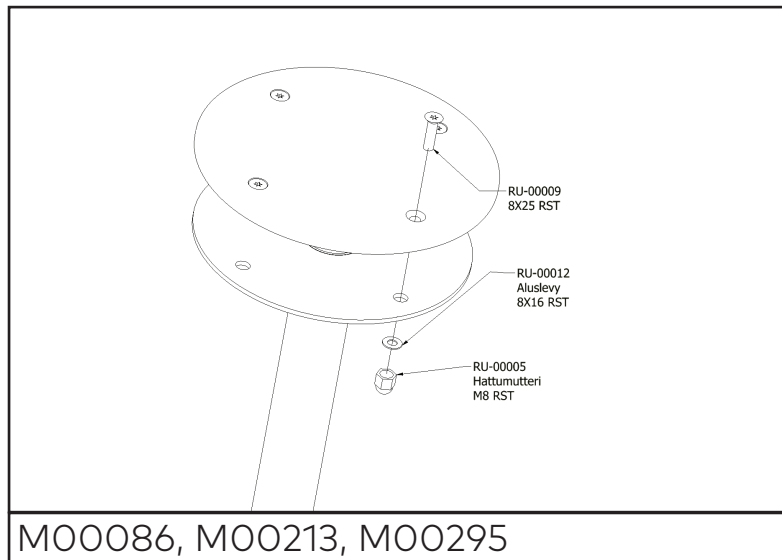

Tolpanhatun kiinnittäminen

